# NETBOXWall Mounting CABINETS





## 19" NETbox Wall Mounting Cabinets

FAMILY

### W=600mm NETbox Series Wall Mounting Cabinets

NETbox series Networking Enclosures/ Cabinets, provide maximum optimization resulted to an optimum performance in between quality and added value.

While product gives maximum performance on cabling and networking infrastructure, in parallel provides a very respective economy compared to its quality which is based on high technologic fully automated industry.

The 600x450, 600x600 and D:150mm Rear Section Modules possible to integrate to d:450mm preferably and either to d:600mm. NETbox Wall Cabinet series is available in 5 heights from 7U through to 20U, Each cabinet is supplied as standard with a glass front door, mechanically screwed steel rear panel and lift off steel side panels, all of which are lockable.

The wide product height portfolio meets any U requirement in infrastructure needs.

NETbox series have a professional technical

but aesthetic look with decorative Aluminium Extruded Housing on the front door; the product range attracts the attention with the mostly environmentally fit and selected color of RAL 9005 Black, and RAL 7035 Light Grey, with fine wrinkle soft touch paint. Anthracite Grey Decorative ABS (Acrylonitrile Butadiene Styrene) material header Unit with art design on PVC provides an aesthetic visuality.

The product range allows with 150mm extention module integration where 4 way access is the question for wall applications.

Completely standard and stocked product portfolio, being delivered a single piece assembled product, as shipping configuration the one set: 2pieces 19" adjustable equipment mounting rails included.

NETbox Series product range with optimal panel mounting size, and a variety range of accessories enclose the whole expectation of users.



19" NETbox Wall Mounting Cabinets F A M I L Y

#### CONSTRUCTION DETAILS:

Main Profile- Framework- Top/Bottom Cases, ABS Fan Housing:

Multi Folded Automated Bending technology applied corner profile system, provides a heavy duty structure results to high load capacity of: 80 kgs on wall.

Monoblock multi folded top and bottom cases 20 times bended resulted to a very heavy construction, tightly fixed to the framework with fixing hardware , fully modular system generated.

Top case has a ready Forced Ventilation (Fan Module) integration ABS housing. Fan Module installation can be operated either from roof or from internal side of cabinet.


The advantage of this system is, once the Fan Unit needs maintenance or replacement and while the cabinet is carrying integrated active and passive networking devices, than subject to remove some of them to replace the Fan Module Unit. Lande Cabinet Fan Module Unit access is from roof where no interference with the already installed components inside cabinets. Decorative Anthracite Grey ABS Fan Module integration housing replacement is toolless. Where the Fan Module to be inserted to the ABS Fan Module Housing without any tool.

Top case integrated with a cable entry point with rubber edged sliding mechanism with w:145mmxd:70mm allows proper cabling insertion. The rubber edged mechanism works between 0 to 50mm slide out.

After inserting the cables, the rubber edged mechanism holds and fixes the cables in parallel preventing the cabinet from dust entry.

Top Case, has ventilation slots at sides which provides passive air ventilation via convention. Once the cabinet is not equipped with forced ventilation (Fan Units), this ABS Fan Housing also provides passive ventilation via convection.

Top Case and Main Frame junctions are closed with Anthracite Grey PVC application for aesthetical appearance.

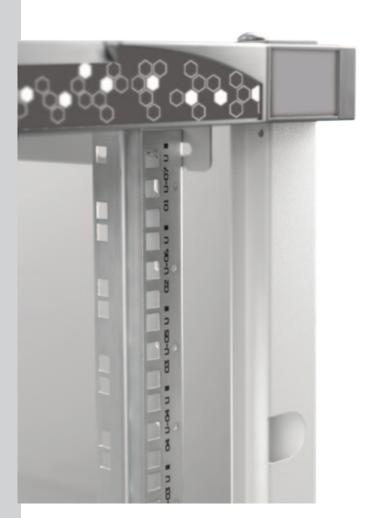





### 19" NETbox Wall Mounting Cabinets <u>F A M I L Y</u>

#### CONSTRUCTION DETAILS:

Access to enclosure:

Front door is integrated with decorative 2,5mm thickness aluminium extruded frames, full length smoked, shatterproof, antistatic, 4,0mm thickness glass with single point locking barrel lock.

Front door Aluminium extruded frame allows, decorative PVC Stripes charming the attraction, Anthracite Grey for RAL 7035 Light Grey Cabinets and Light Grey for RAL 9005 Black cabinets

Front door openning direction is set right to left, but reversible to left to right at site with removing the hinge system. Hinge System is spring loaded easy operating version, which allows you to remove the whole front door from cabinet in seconds.

Alternative doors ( Curved Glass and Solid Metal) are available for customer selection. **\*\*\*** Please see door options at the end of each product size.

Side Panels are lockable and removable with barrel style lock, Multifolded bending technology with 8 fold bending provides the rigidity. Easy mechanical locking of panel to main frame with snap capture system allows easy attachment of panels and easy removal in seconds while installation in process.

Rear Panels are mechanically screwed to main module, which is Multifolded bending technology with 5 fold bending provided the rigidity.

Rear Panel can be used for wall fixing and drilling pattern.

Bottom case and Rear Panel integrated with PVC gland plate. Once needed gland plate and rubber edged sliding mechanism could be replaced on site

19" rails of Lande NETbox Series Wall cabinet are with automated silk-screen U numbering, depends on size 1U to 20U, same from top to bottom or bottom to top results to same U height selection. No matter where you have started counting from. 19" rails are 4 fold bending surfaces, 1,5mm thickness provides the high load capacities. The 19" rails are made of steel with 8-12 micron zinc plating for corrosion resistance. 19" rails are adjustable in depth. For easy adjustment purpose, no need to detach the screws, just ease the screws and slide them in the channels on the top/bottom chasis bends.

All design features provide 3 way access to your enclosure and equipments, easy to reach to enclosure and equipments for all infrastucture installations and maintenance needs.





4

### 19" NETbox Wall Mounting Cabinets F A M I L Y

#### ADDITIONAL FEATURES:

NETbox Wall cabinets has an ABS Decorative header unit, where has a placement for the Digital Thermometer with 1 meter cable probe, integrated with 2 lithium battery with 2 year life, measurement once for every minute as accessory to be ordered.

NETbox Wall cabinets has sticky colour changing thermometer, range 20 to 40 C; as an accessory.

NETbox Wall Cabinets has a decorative ABS header unit. For volume orders or projects, please coordinate with sales department to select any other color application than Anthracite Grey standard offer by Lande.

Your company corporate colors are applicable!

NETbox Wall Cabinets have mechanically screwed rear panel. The panel can be used as wall fixing pattern on wall. This feature provides cost efficieny at site applications where a heavy enclosure to be fixed to wall. At least 2 technicians needed in standard. Lande NETbox cabinets are applicable with one technician at site only.

First the rear panel to be placed on wall for marking purposes, than drilling to be operated, finally the rear panel to be fixed on wall without the main cabinet unit.

Finally the cabinet to be hanged over the rear panel. For safety reasons the screwing must be completed. Without screws even cabinet safely should stay on wall.

NETbox wall cabinets offers one more advantage for site application, the internal active and passive components can be assembled to cabinet on the workshop. Afterwards wall fixation can be the process follows. Only the connection of the cables and power to be operated. This would be a big advantage for technicians while the Wall cabinet to be assembled to very high placements and locations especially in factory or warehouse conditions, where distribution infrastructure in cabinet to be completed at 4 to 8 meter high

Rear Panels are mechanically screwed to main module, which is Multifolded bending technology with 5 fold bending provided the rigidity.

Rear Panel can be used for wall fixing and drilling pattern.













### 19" NETbox Wall Mounting Cabinets F A M I L Y

#### ADDITIONAL FEATURES:

All Lande NETbox Wall Cabinets are proper to integrate with caster group or Adjustable leveling feet group. This feature provides a possibility of using wall cabinets as for free standing purposes, especially where the narrow places are the case. As well integration with caster group or PVC adjustable leveling feet group provides a possibility to use the cabinet for underdesk applications.





Please see detailed description in accesorry section.

Part numbers to order:

\*\*\* LN-ZMN-TKR-5020-XX for Caster Group Set LN-ZMN-PNY-1040-XX for PVC Leveling Feet Group Set

Once using the Lande NETbox wall cabinets for Free standing purposes, and access from rear of the enclosure is mandatory request of integration, than please find the hinged rear door option instead of screwed panel option at the end of each product size.

Lande NETbox wall cabinets are being delivered with 1set: 2pcs 19" Rails.

Once a 4 point fixing shelf or any other 4 point fixing equipment to be installed, an additional set of 19'' rails to be ordered. With this application it is possible to locate some deeper networking devices as well some heavy equipments like UPS's etc. Part numbers to order:

\*\*\*LN-PRF-CMD-xx UD-ZN

Define xx as the U height of intended NETbox wall cabinet to be used

Example Part Nr: LN-PRF-CMD-07UD-ZN

Please see detailed description in accesorry section.

Lande NETbox wall cabinets are in RAL 7035 Light Grey color from stock.

Black RAL 9005 Color application is possible. Please co-ordinate with sales department of Lande for Black request especially for projects and concrete requests of customers.









Width: 600 mm. Depth: 600 mm.

### Width=600mm Depth=600mm

2 different U heights: 22U, 26U



**ISO 9001:2008** Quality Management System

EN 61587-1 -Mechanical Structures, cabinets for electronic equipments

IEC 297-1, 19" mounting IEC 297-2 Overall cabinet dimentions



**CE conform to** EN 60950-1:2006 Information Technology Equipment-Safety-Part-1-General Requirements



**Environment Friendly;** \*Environmental awareness \*RoHS compliancy \*% 100 Recyclable Material

Load Capacity: 80 kgs.



#### **Standard Colors:**




RAL 9005 Black

RAL 7035 Light Grey


For Project case applications, Lande NETbox Wall cabinets are being produced at 22U and 26U 600x600 mm sizes. These product sizes are not kept in stock. With hinged rear door application, as well caster group and leveling feet set added configuration should perform 80 kg on wall with a wall support kit, and up to 300 kgs on the floor.

\*\*\* Please see door options at the end of each product size.




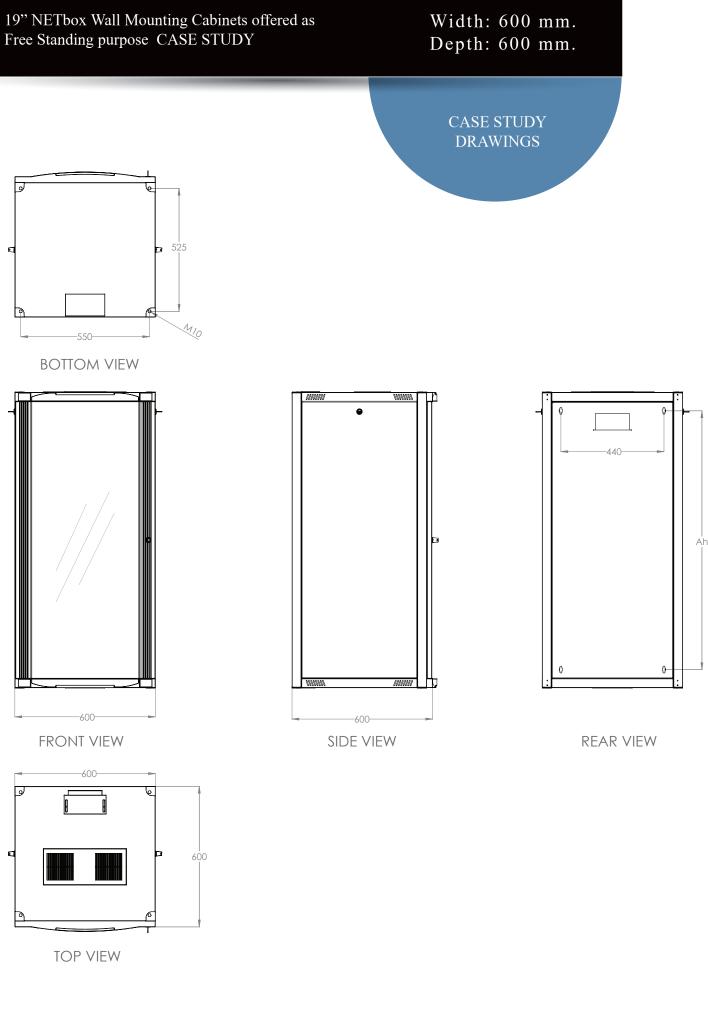








ISOMETRIC VIEW





EXPLODED VIEW





**DIMENSIONS IN** WIDTH AND HEIGHT

FRONT DOOR OPENING ANGLE

#### MAX/MIN/STD EQUIPMENT MOUNTING DISTANCE

NETbox Series Wall Mounting 19" Cabinets W=600mm D=600mm / 22U & 26U

ROOT Product Number ***	Product Description	Size WXDXH mm	h size in U	h in mm	*H mm, overall without feet and/or castor	Width Overall mm	Ah Wall Mounting h mm	Width Rail to Rail	Depth Overall mm	**Depth Shipping Co Rail to Rail mm	QTY IN PACKAGE	PACKING DIMENTIONS WXDXH mm	Standard NET Weight of product kg	Gross Weight of Product kgs	QTY IN PALETTE	PALETTE DIMENTIONS WXDXH mm	Palette Weight kgs
LN-WM22U6060-CC-111	22U 19" Wall Mounting Cabinet W=600mm D=600mm With Rear Panel, 4 pcs equipment mounting rails	600x600x1090	22U	1004	1090	600	927	19"	600	375	1	620x620x1120	34,5	36	8	1300x1300x2380	314
LN-WM26U6060-CC-111	26U 19" Wall Mounting Cabinet W=600mm D=600mm With Rear Panel, 4 pcs equipment mounting rails	600x600x1268	26U	1181	1268	600	1105	19"	600	375	1	620x620x1300	39,5	41	6	1300x1300x2050	275
LN-WM22U6060-CC-121	22U 19" Wall Mounting Cabinet W=600mm D=600mm With Hunged and barrel locking Rear Door, 4 pcs equipment mounting rails	600x600x1090	22U	1004	1090	600	-	19"	600	375	1	620x620x1120	36	37	8	1300x1300x2380	310
LN-WM26U6060-CC-121	26U 19" Wall Mounting Cabinet W=600mm D=600mm With Hunged and barrel locking Rear Door, 4 pcs equipment mounting rails	600x600x1268	26U	1181	1268	600	-	19"	600	375	1	620x620x1300	40	42	6	1300x1300x2050	269
LN-RAF-RAY-WM-CC	Wall Support Kit for 22U and 26U Size W= 600mm D= 600mm, Recommended to Use on Wall 1 Set 2 pcs	250x250x50	-	-	-	-	-	-	-	-	1 set	260x260x110	1,8	2	-	-	-

\* Please add 30mm to H mm once used with leveling feet, add 60mm to H mm once used with castor set.
\*\* See min and max Adjustable depth variations on drawings.
\*\*\*CC= LG for Light Grey RAL 7035 & BL for Black RAL 9005 for customers to define while ordering, for "111" selection please see the door options.





XX Numeric Character defining the height of enclosures, depending on model differences between 12 to 45 to be selected from price list, website or catalogue

DD The First 2 digits of the depth info, 45 for D=450mm, 40 for D=400mm, 60 for D=600mm, 80 for D=800mm, 10 for D=1000mm cabinets

CC Color Code, LG for Light Grey RAL 7035, BL for Black RAL 9005

should be delivered

0 Side Panel/Door Variation number numeric character 1 to 9 / 0 means no side panel on product, standard side panel/door defined in Lande System as option 1. Unless defined option 1 should be delivered

